


MOBILE SMA ANTENNA WITH 450 MHZ

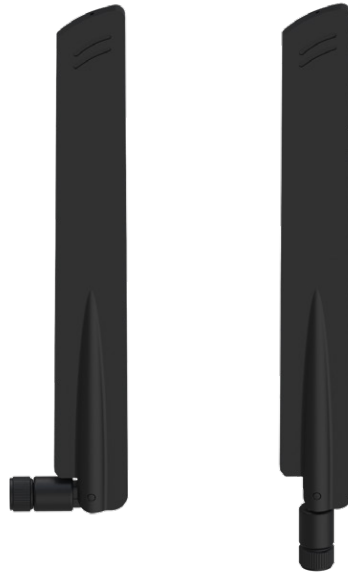


Mechanical/Environmental

Frequency range	450 ~ 466, 716 ~ 960, 1710 ~ 2180 MHz
Polarization	Linear
Gain	4.0 dBi
V.S.W.R	≤3.5
Impedance	50 Ω
Connector type	SMA Male
Operating Temperature	-20 °C ~ +65 °C
IP rating	IP20
Weight	45 g
RoHS compliant	✓
REACH compliant	✓


Radiation patterns

Mobile - Antenna

ELEVATION

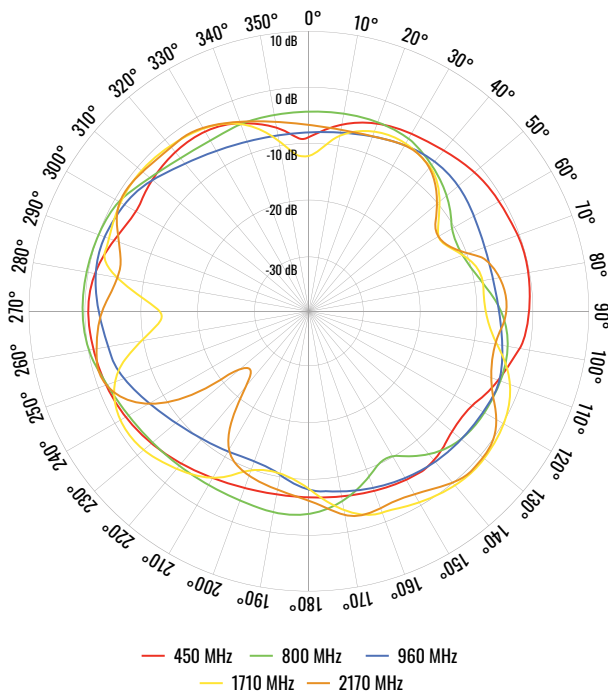

AZIMUTH

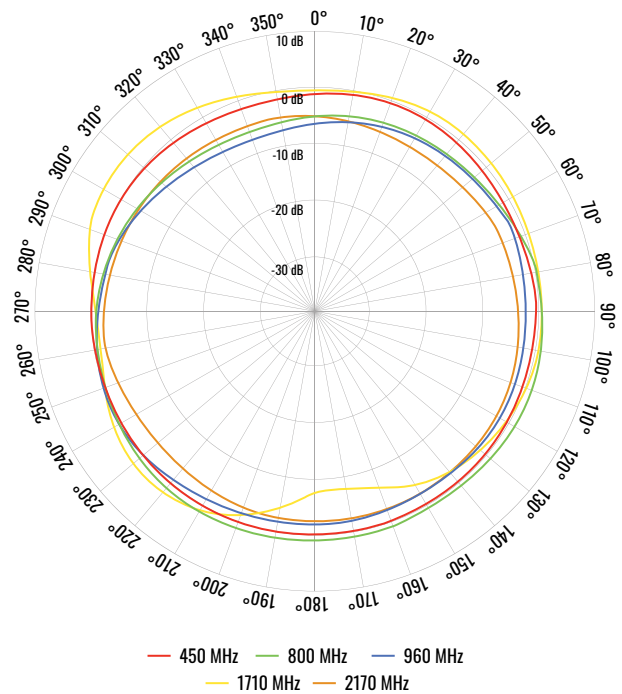

Spatial measurements

